


Specification Sheet

Description **TRANSCUBE STANDBY 50TCG**

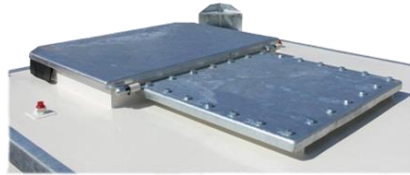

- ♥ 4535 litre model to be transported full of diesel, (transport empty on public roads).
- ♥ Easily stacked 2 high (full) 3 high (empty) to reduce storage space requirements.
- ♥ Access manhole for maintenance and inspection of inner tank.
- ♥ Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the Transcube 50TCG full of fuel.
- ♥ 110% enclosed steel weatherproof bund for safe storage of fuel in compliance with PPG2 Regulations.
- ♥ All fill ports and fittings housed within the secondary containment area.
- ♥ Secure lockable access hatch to house pumps (electric and hand) and feed and return connections for up to 3 generators.
- ♥ Ability to supply fuel for up to 3 generators and refuel plant machinery all at the same time.
- ♥ Sized to stack inside shipping containers and across truck beds providing economical transportation.
- ♥ Protective galvanised framework preventing damage to tank, paintwork and decals.

Specifications			
Standard Tank Fittings: 3" Fill Point : 2" Fill Point: Gauge: Pressure Vacuum Vent: Breather Vent : 1 x ¾" Pump Feed: 1 x ½" Generator Feed & Return: 4 x 1½" Sockets: 1 x ½" Socket: Inspection Manhole: Pump Bracket			
Capacity (brim full) Litres:	4535	Weight Laden (kg):	8300
Capacity (safe fill) Litres:	4400	Weight Unladen (kg):	1676
Dimension Length (mm):	3008	Inner Tank Material (thickness):	3mm (S235)
Dimension Width (mm):	2307	Bund Material (thickness):	3mm (S235)
Dimension Height (mm):	1319	Design Approvals:	Bunded to COP Regulations (PPG2 & BS799 Part 5)
Cabinet Dimensions (mm) Opening Size:	To suit standard pump	Design Standards:	AS 1692-2006

